





Woodstock Marketing

Melanie

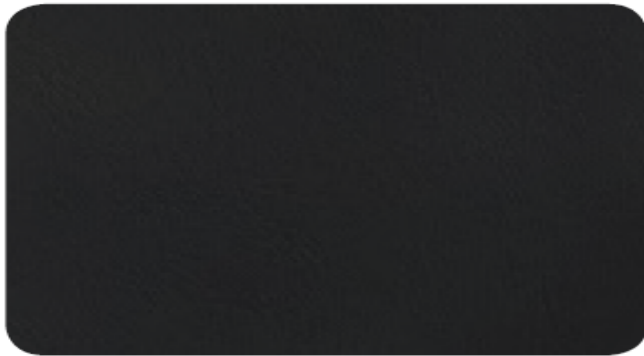

CARBON BLACK NAPPA

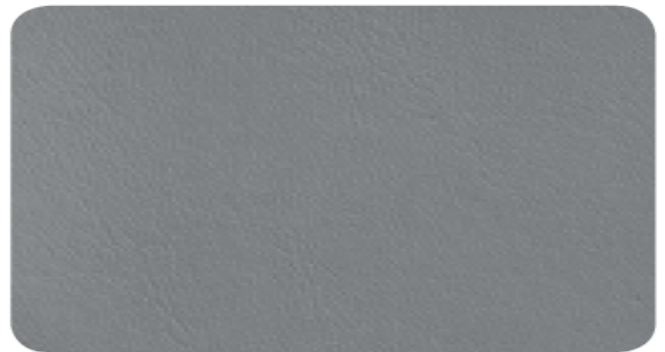

MIDTOWN GRAY NAPPA



GRAY FABRIC



CHARCOAL FABRIC

Fabric

Thickness	/	UAGE-01	mm	AS spec'd		
Weight	/	UAGE-02 (SOP 4)	g/m ²	AS spec'd		
Breaking Force	Length	UAST-02 (DIN EN ISO 3376,ASTM 5035,DIN 53504,DIN 53543,EN ISO 2062,NFT 51-034)	kg/cm	10(Min)	22	
	Width			10(Min)	19.1	
Elongation	Length	UAST-02 (DIN EN ISO 3376,ASTM 5035,DIN 53504,DIN 53543,EN ISO 2062,NFT 51-034)	%		39.3	
	Width				24.3	
Tearing Strength Tongue Method	Length	UAST-01 (DIN 53329-A,ASTM D2262,DIN 53507 A/B,DIN 53543)	kg	4(Min)	12.2	
	Width			4(Min)	10.9	
Seam Strength	Length	UAST-03 (SATRA PM 33)	kg/cm	5(Min)		/
	Width			5(Min)	/	/
Martindale Abrasion	dry	UAGE-15(PREN ISO 5470-2,SATRA PM31)	Cycles	50000	>100000	
	wet			/		
Rubbing Fastness	dry	UAGE-12	Cycles	4	4-5	/
	wet			4	4-5	/
Courtauld (Phenolic)Yellowing Test for White and Light Color	Grain	UAFT-02 (SOP 25)	AATCC Rating	4-5(Min)		
	Fleah			4(Min)		
Test Name/Method	Test Detail		Minimum Specifications		Actual Results	
California 117 Fire	Flammability		Pass		Pass	

Care Instructions

Frequent vacuuming of light brushing to prevent overall soiling

Spot clean only with water based shampoo or foam upholstery cleaner

Pretest an inconspicuous area before proceeding

Do not over wet

Do not use solvents to spot clean

Nappa

Test Name/Method	Test Detail	Minimum Specifications	Actual Results
California 117 Fire	Flammability	Pass	Pass

Care Instructions For Nappa And Mesh

Clean with products meant to clean leather/vinyl auto interiors.

We specifically recommend 303® MULTI-SURFACE CLEANER or Griots Garage Interior Detailer.

Pretest an inconspicuous area before proceeding.

Do not use solvents to spot clean.