




Woodstock Marketing

Ravi Chair


BACK MESH – ALL RAVI CHAIRS

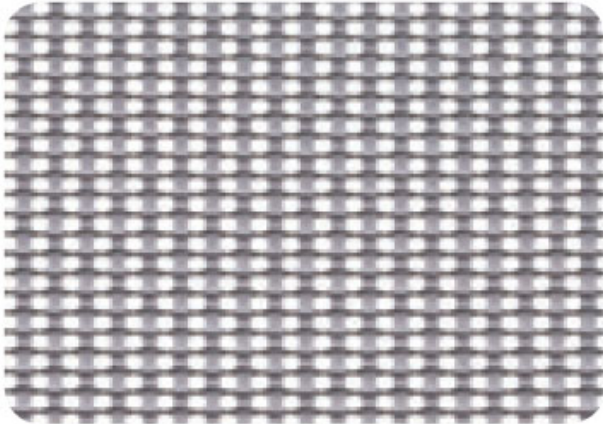

SEAT FABRIC – SELECT ONE



RED RAVI FABRIC

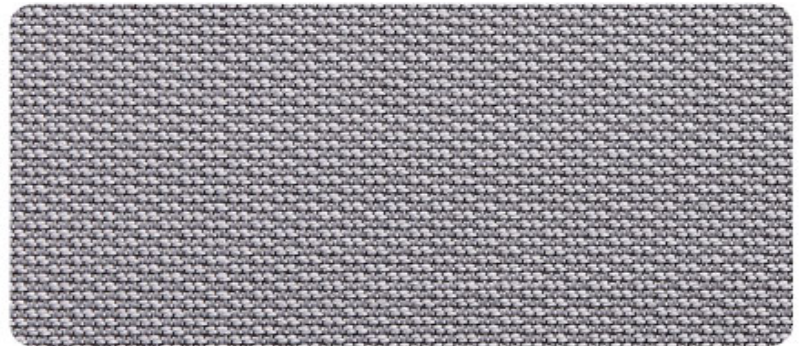

GRAY RAVI FABRIC



BLACK RAVI FABRIC

Ravi Chair

Specification sheet for Upholstery Fabric

Fiber Content 100% Polyester

Test Name/Method	Test Detail	Minimum Specifications	Actual Results
AATCC 8	Colorfastness to Crocking (if Dyed)	Wet – 3 min. Dry – 4 min.	Wet – 4.5 min. Dry – 4.5 min.
AATCC 107	Colorfastness to Water/Cold Bleed (if Dyed)	Shade change – 4 min. Staining – 3 min. Migration – 3 min.	Shade change – 4.5 min. Staining – 4.5 min. Migration – 4.5 min.
ASTMD5034	Tensile Strength	Warp – 50 pounds Fill – 5 pounds	Warp – 230 pounds Fill – 200 pounds
ASTMD2261	Tongue Tear	Warp – 6 pounds Fill – 6 pounds	Warp – 31 pounds Fill – 35 pounds
California 117 Fire	Flammability	Pass	Pass
ASTM D4157.2002	Abrasion	30,000 Double Rubs	Over 100,000 Double Rubs

Care Instructions

Frequent vacuuming or light brushing to prevent overall soiling

Spot clean only with water based shampoo or foam upholstery cleaner

Pretest an inconspicuous area before proceeding

Do not over wet

Do not use solvents to spot clean